

Also Available As OEM Products

Specification & Features

UV Stabilized Plastic
Flame Rating: 5VA/V-0 (Grey), HB (colors)
Polycarbonate (Fiberglass Reinforced Grey)
Single or Dual Cavity Options (More Information)
RotoLock Mechanism Option Available (More Information)
1.5" Minimum Stand-out Height for Internal Units(More Info)
2.4" Minimum Stand-out Height for External Units (More Info)
4.7" Maximum Stand-out Height for Internal & External Units using Extension Collar on Page 53 (More Information)



The AE Products Meter Socket Interface is the ideal solution for OEM equipment that needs to be incorporated into a Meter Base application. The internal version of the INT interfaces internally for common industry modules such as switching circuits, monitoring circuits and communication circuits. While the external version has an attached box where components can be installed.

Model Number Configuration

MSI - IDC - 02S - 01 / 265 - _____

Socket Extender	Meter Form	Color	Options (multiple options allowed)	
IDC - Internal	01S = 1S	01 - Gray	First 5 available for internal units only	Stand-out Height (required) 150 - 1.50" 325 - 3.25" 175 - 1.75" 340 - 3.40" 200 - 2.00" 350 - 3.50" 225 - 2.25" 365 - 3.65" 230 - 2.30" 375 - 3.75" 240 - 2.40" 390 - 3.90" 250 - 2.50" 400 - 4.00" 265 - 2.65" 415 - 4.15" 275 - 2.75" 425 - 4.25" 290 - 2.90" 440 - 4.40" 300 - 3.00" 465 - 4.65" 315 - 3.15" 470 - 4.70"
Dual Cavity	02S = 2S	02 - Black		
ISC - Internal	03S = 3S	03 - Blue		
Single Cavity	04S = 4S	04 - Clear		
EDC - External	05S = 5S	05 - Fern Green		
Dual Cavity	06 - Fluor Green	06 - Fluor Green		
ESC - External	12S = 12S	07 - Orange		
Single Cavity	13S = 13S	08 - Red		
	14S = 14S	09 - Pink		
	15S = 15S	10 - Off White		
	16S = 16S	11 - Yellow		
			Enclosures K11 - Gray Box & Door K14 - Gray Box & Clear Door K22 - Black Box & Door K24 - Black Box & Clear Door K55 - Green Box & Door K54 - Green Box & Clear Door A11 - Premium Gray Box & Door S11 - Gray Box w/Screw-on Lid CSE - Customer Supplied Box	
			Coupler SQC - Square Coupler	
			Ground GND - Meter Ground (Strap)	
			Jaw Blade Configuration JB3 - 3 o'clock position JB6 - 6 o'clock position JB9 - 9 o'clock position	
			RotoLock Mechanism RL - RotoLock Mechanism	

Additional customizations are available.
Please contact the factory for all options.


Note: You may add additional options as needed by extending the model number

1349 South Killian Drive • Lake Park, FL 33403 • 866.848.7756 • sales@aeproducts.net

www.aeproducts.net

Meter Socket Interface

Also Available As OEM Products


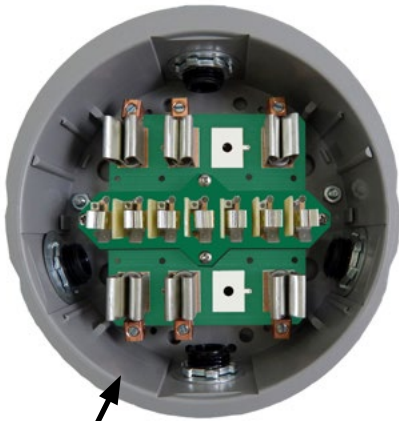


Universal Meter Interface (UMI)
 Up to 8 standard jaws and 7 potentials. Multiple configurations available.

Various Boxes Available



Dimensions

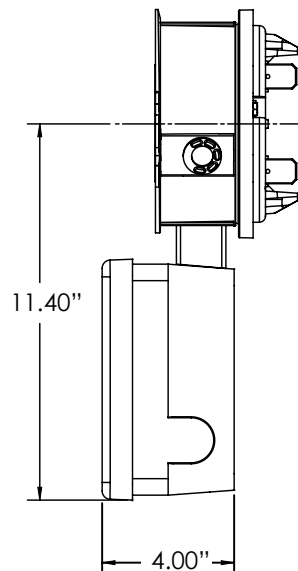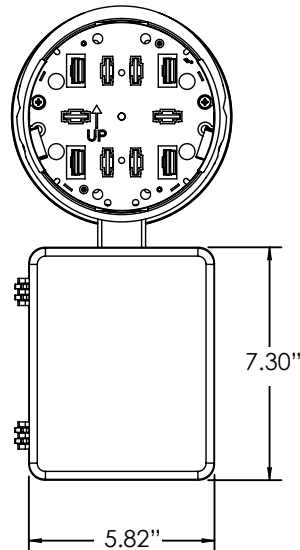

(Diagrams are not to scale)