

Also Available As OEM Products

## Specification & Features

UV Stabilized Plastic
Flame Rating: 5VA/V-0 (Grey), HB (colors)
Polycarbonate (Fiberglass Reinforced Grey)
External Ground Connection Available
Meets all ANSI and UL Dimension Requirements for Meter Sockets
Offered in Standard Profile (2.4" Stand-out) and Low Profile (1.5" Stand-out)





The AE Products Meter Socket Converter will convert various meter forms to fit the desired application.

**Example:**

A three phase service converted to a single phase.

## Dimensions

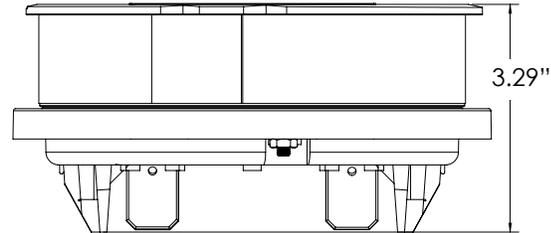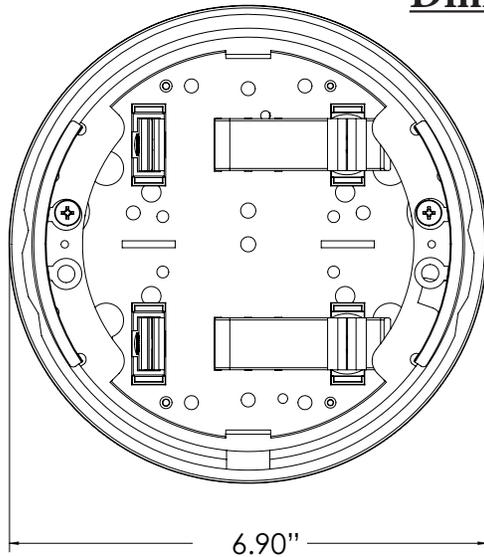

## Model Number Configuration

(Diagrams are not to scale)

**CNV - LP - 16S - 01 / 02S - GND**

Standard Size	Meter Box (Socket) Form	Color	Conversion Meter Form	Ground
LP - Low Profile	12S - 12S	01 - Gray	02S - 2S	GND - Meter Ground (Strap)
SP - Standard Profile	14S - 14S	02 - Black		
	15S - 15S	03 - Blue		
	16S - 16S	04 - Clear		
	25S - 25S	05 - Fern Green		
		06 - Fluor Green		
		07 - Orange		
		08 - Red		
		09 - Pink		
		10 - Off White		
		11 - Yellow		

Additional conversions are available. Please contact the factory for all options.

Note: You may add additional options as needed by extending the model number