

Also Available As OEM Products

Specification & Features



UV Stabilized Plastic
Flame Rating: 5VA/V-0 (Grey), HB (colors)
Polycarbonate (Fiberglass Reinforced Grey)
NEMA 1
Sturdy Handle for Easy Installation & Removal
ANSI C12
10kAIC @ 480V
120/240V or 240/480V
Narrowed Stabs for Easier Insertion and Withdrawal with Bypass Handle Down
50A, 2-Pole, Trip Curve C Breaker
Load Side Power Indicator Light
Use with Bypass Meter Sockets (12S & 2S Meter Forms)



This device is NOT intended for Continuous Use.
 Keep Dry. Do Not Use in Rain.

The AE Products 50amp Disconnect safely allows operation of the lever bypass.

Dimensions

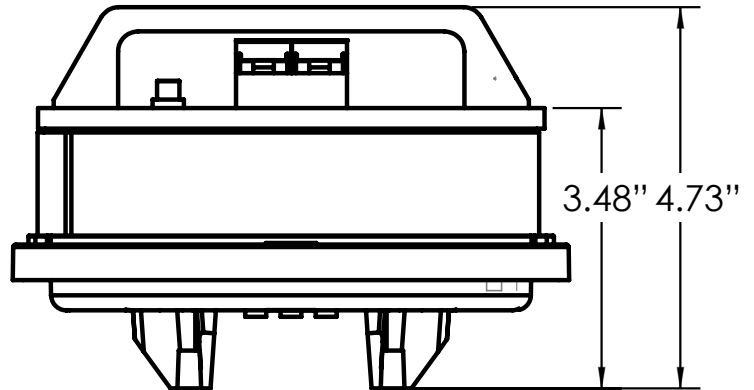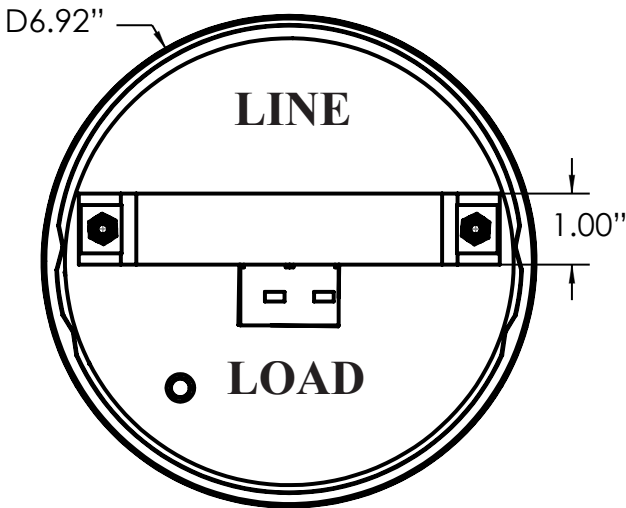

(Diagrams are not to scale)

Model Number	Description
SDA-50-01/01	50 Amp Disconnect in Grey
SDA-50-01/07	50 Amp Disconnect in Orange
SDA-50-01/08	50 Amp Disconnect in Red